

# Farm Pro

Simply The Best

## 6.4m<sup>3</sup> Grouper Bin

### Features "Standard"

- Wireless Remote Auger Control
- Hot Dipped Galvanised Auger's & Chassis Augers
- Galvanised Cone's at 43 Degree Angle "Total Cleanout"
- Heavy Duty Roll Top Tarp
- Heavy Duty Tie Down Points
- Heavy Duty Standard Fork Lifting Points



15 hp "T" gear box with "Chain Drive To

- **Augers" And Direct Coupled Electro Magnetic Clutch**
- Anderson Plug Connection With All Wiring "Concealed & Protected"
- Control Box Fitted With "LED" Power Indicator Light and Circuit Breakers
- **13.0 HP**, Rope Pull Motor (Oil Alert)
- Telescopic Drop Tube. High Capacity And Light Weight
- Mix Grains Through Cross Auger To, Ground, or Top Auger Discharge.
- Separate Variable Flow Controls for Each Bin
- Twin Bins 3.2m<sup>3</sup> each (6.4m<sup>3</sup>, Total).



- Full Length Side Walkway & Grab Handles
- All Augers 6" and PVC Lined
- Self Lifting Auger With Ratchet Strap Tie Down
- Dual Sight Gauges In Both Bins
- Full Spec Warning Labels
- Twin Belt Drive From Motor To Clutch
- **4 Year Structural Warranty**



Australian Designed, Manufactured & Supported

[www.farmpro.com.au](http://www.farmpro.com.au)

[sales@farmpro.com.au](mailto:sales@farmpro.com.au)

Ph 03 5495 3101, Sales 0429 953 101, 20 Kell Rd, St Arnaud, Vic, 3478

# Farm Pro

## Simply The Best

### Options

- 16 HP Electric Start Motor With Battery
- 12 Volt Electric Rams For individual outlet control with remote operation.
- Overhead & Ground Side Discharge Outlets
- "Auger" Weather Protection Cap
- Different Length Augers Available From 0.500 to 3.200m (Folded Section)
- 2 Pac Epoxy Coated Bins
- Multiple Auger Selection (Side & Front)
- Automatic, Adjustable Additive Box (Suits Powder or Granuals)



**Side Discharge, Dual Pictured** (Chute and Drop Tube)



**Additive Box**



**Electric Rams**



**Hinged Outlet**




**Multiple Augers**



**Fork Lifting Point**

### Std Specifications

<b>Overall Length:</b>	4.250m
<b>Overall Width:</b> (Including Auger)	2.250m
<b>Overall Width:</b> (Base)	1.520m
<b>Overall Height:</b>	2.000m
<b>Overall Weight:</b>	980kg
<b>Motor Size:</b>	13.0hp
<b>Tarp:</b>	Roll Top Full Length & Width
<b>Cross &amp; Lift Auger:</b>	Hot Dipped Gal 6" PVC lined

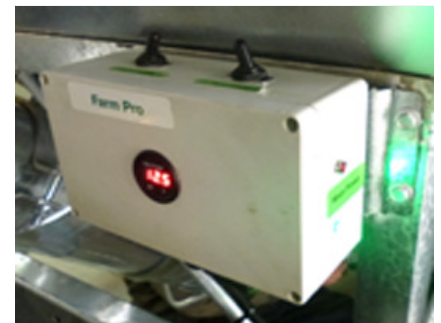


**Weather Proof Electronics**



**Weather Protection Cap**

### Working Dimensions Based On 900mm Tray Height

<b>Bin Fill Height:</b> (Side of Bin)	2.750m
<b>2.8m Auger:</b> (Std) PVC Lined	
Height Underneath "Green" Outlet:	4.550m
Distance From Bin to Auger Tip:	1.850m
<b>1.5m Auger: (Option)</b>	
Height Underneath Chute Outlet:	3.500m
Distance From Bin to Auger Tip:	1.000m

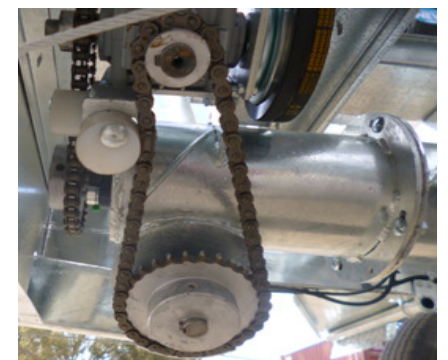

**Direct Coupled Chain Drive Augers**



**Full Flush Out Inlet**

[www.farmpro.com.au](http://www.farmpro.com.au)

Ph 03 5495 3101, Sales 0429 953 101, 20 Kell Rd, St Arnaud, Vic, 3478

\*\*Options and Specifications subject to change due to constant product improvement\*\*